




## Compact LCD Projectors with Easy Installation, Maintenance and Operation

- 4 500 ANSI lumens high brightness
- Easily-replaceable lens system: 1:1.2 zoom lens included. Four optional exchangeable lenses available.
- Eco+Quiet mode direct button reduces fan noise and extends lamp life.
- Security pack with kensington lock, system lock function, ceiling lock-down structure and theft monitoring via LAN
- LAN connection, projector control via web browser, remote periodic diagnosis, and ability to link to a specific website.
- Direct power off and auto restart
- Auto keystone correction
- New tilt leveler for flexible setting
- Warranty 3 years

# XG-C465X

Specifications (Tentative)		
Model		XG-C465X
Panels		0.8" LCD panel x 3
Number of pixels		XGA (1 024 x 768)
Resolution		4 500 ANSI lumens
Contrast ratio		450:1
Lens	F number	F 1.7 - 1.9
	Zoom	Manual, x1.2 (f = 28.0 - 33.6 mm)
	Focus	Manual
Picture size		40" (102 cm) to 500" (1 270 cm)
Projection distance		40": 1.5 - 1.7 m, 100": 3.7 - 4.3 m, 500": 17.8 - 21.4 m
Input signals	DTV	1080I / 720P / 576P / 576I / 540P / 480P / 480I NTSC / PAL / SECAM
	Computer RGB * Compression	SXGA+* / SXGA* / WXGA*, Mac 21", XGA / SVGA / VGA/VESA Mac 21"* / 19" / 16" / 13"
Input terminals	DVI-I (Compatible with HDCP)	x 1
	Computer / Component (mini D-sub 15 pin)	x 2
	S-Video (mini DIN 4 pin)	x 1
	Video (RCA)	x 1
	Audio (φ 3.5 mm stereo mini jack)	x 2
	Audio (RCA)	x 2 (L/R)
Output terminals	Computer / Component (mini D-sub 15 pin)	x 1
	Audio (φ 3.5 mm stereo mini jack)	x 1 (variable audio output)
Control and communication terminals	LAN (RJ-45)	x 1
	USB (Type B)	x 1
	RS-232C (mini DIN 9 pin)	x 1
	Wired remote (φ3.5mm stereo mini jack)	x 1
Horizontal frequency		15 - 70 kHz
Vertical frequency		43 - 85 Hz
Speakers		2 W (mono)
Fan noise		37 dB (Standard Mode), 32 dB (Eco + Quiet)
Projection lamp		275 W
Lamp life		3 000 hours (Eco + Quiet)
On-screen display languages		English, German, Spanish, Dutch, French, Italian, Swedish, Portuguese, simplified Chinese, Korean, Japanese, Russian, Arabic, Polish, Turkish
Rated voltage		AC 100-240 V
Rated frequency		50/60 Hz
Input current		3.6 A
Power consumption (standby)		360 W (6 W) with AC 100V, 345 W (8 W) with AC 240V
Operation temperature		41 ° F to 95 ° F (+5 ° C to +35 ° C)
Cabinet		Plastic
Dimensions (main body only) W x H x D		12 <sup>27</sup> / <sub>32</sub> " x 4" x 11 <sup>1</sup> / <sub>64</sub> " (326 x 101.5 x 279.5 mm)
Weight (approx.)		10.8 lbs. (4.9 kg)

Design and specifications are current as of August 2007, but are subject to change without notice.

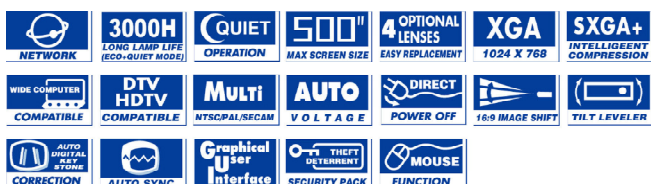

Sharp Electronics (Nordic) AB  
 Box 14098 • 167 14 Bromma  
 Tel 08-634 36 00 • Fax 08-634 36 10  
[www.sharp.se](http://www.sharp.se)

# SHARP