



SD206U


HIGH VERSATILITY AT A LOW PRICE.

The new SD206U is a genuine multitalent. Its clear and vivid SVGA images will transform your presentations and home film screenings into something really spectacular. And it's excellent value for money, too!

The superb 2000:1 contrast ratio guarantees highly detailed images and thanks to a brightness value of 2000 ANSI lumens you won't need to worry about darkening the room. The SD206U weighs in at just 2.9 kg, which makes it great for use on the move. Alongside its impressive image quality, the SD206U boasts outstanding reliability: its lamp operating life of up to 3000 hours is another convincing reason to choose this versatile projector.

HIGHLIGHTS

- DLP® technology
- 2000 ANSI lumens
- Contrast ratio: 2000:1
- Resolution: SVGA (800 x 600 pixels)
- Weight: 2.9 kg
- Up to 3000 hours lamp operating life

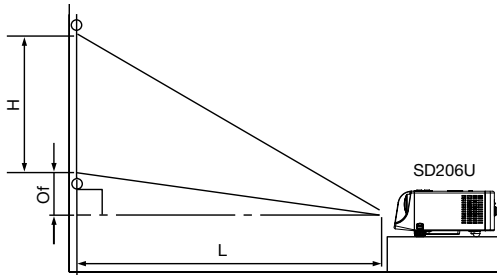

Diagonal Size cm	Picture Size (4:3 format)		Distance from Screen (L)		Offset (Of) cm
	Width cm	Height (H) cm	m/minimum with maximum zoom	m/maximum with minimum zoom	
102	81	61	1.4	1.5	8.8
152	122	91	2.2	2.3	13.3
203	163	122	2.9	3.1	17.7
254	203	152	3.6	3.9	22.1
381	305	229	5.4	5.8	33.1
508	406	305	7.2	7.8	44.2
635	508	381	9.1	9.7	55.2
762	610	457	10.9	-	66.3

Specifications

Model

Model	SD206U
Technology	0.55" DLP® chip, 12° DDR, DDP 2000
Resolution	800 x 600 (total 480,000 pixels)
Brightness	2000 ANSI lumens
Contrast	2000:1 (on/off)
Colors	16.77 million
Video	500 lines
Vertical Frequency (V-Sync)	50–85 Hz
Horizontal Frequency (H-Sync)	15–80 kHz
Band Width	up to 110 MHz
Projection Lamp	205 W
Lamp Life	approx. 3000 hours (low mode) ¹
Lens	F/2.5, f = 19.9–21.4 mm
Focus/Zoom	Manual focus and zoom (zoom ratio: 1.1:1)
Throw Ratio	1.8–1.9:1
Picture Diagonal	1.02–7.62 m
Fan Noise	34 dB (low mode)
Audio Speaker	2 W mono
PC Compatibility	640 x 480 to 800 x 600 (compr. 1024 x 768 pixels), Sync on green available
Video Compatibility	NTSC/NTSC 4.43, PAL (incl. PAL-M, N), SECAM, PAL-60, Comp. Video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i, 60 Hz), 1080i (1125i, 50 Hz)
Features	Digital Keystone Correction (vertical), Video-Line Doubler (2:3 pull-down), PIN code protection (menu access), instant shut-down, security anchor, 10-language OSD
Input Terminals	PC (RGB): 1 x mini-D-sub 15-pin Audio: 1 x stereo-mini-jack (Ø 3,5 mm), Video: 1 x RCA, 1 x S-Video
Output Terminals	PC (RGB): 1 x mini-D-sub 15-pin, Audio: 1 x stereo-mini-jack (Ø 3,5 mm)
Communication Terminals	RS232C (D-sub), USB-terminal for page up/down function
Remote Control	Complete operation of the projector, PowerPoint page with up/down via USB
Dimensions (W x H x D)	256 x 88 x 223 mm
Weight	2.9 kg
Power Consumption	approx. 300 W
Power Supply	AC 100–240 V, 50/60 Hz
Supplied Accessories	Cable set, remote control (incl. batteries), soft bag, multilingual operation manual (CD-ROM), quick start guide, safety manual, lens cap

¹ Depending on the operation environment and application. This is an average value given by the manufacturer based on ideal conditions.



Mitsubishi Electric Europe B.V. • German Office • Electronic Visual Systems • Gothaer Str. 8 • D-40880 Ratingen
Tel.: +49 (0) 21 02/4 86 92 50 • Fax: +49 (0) 21 02/4 86 73 20 • www.Mitsubishi-EVS.de