



XD206U

CAST A NEW LIGHT ON YOUR FILMS AND PRESENTATIONS.


Multimedia shows, presentations, home cinema: the DLP® projector XD206U is a versatile all-rounder. It casts a whole new light on your projections – in 2000:1 contrast.

Thanks to its extraordinary brightness of 2000 ANSI lumens, it makes a winning impression even in rooms with difficult lighting conditions. Its digital keystone correction prevents vertical distortion – the XD206U always delivers images true to your format.

At just 2.9 kg, it's an ideal companion for use on the road. Its lamp boasts a service life of 3000 hours – and to make sure you can keep enjoying its full advantages, the XD206U can be safeguarded against theft by means of a metal anchoring mechanism.

HIGHLIGHTS

- DLP® technology
- 2000 ANSI lumens
- Contrast: 2000:1
- Resolution: XGA (1024 x 768 pixels)
- Anti-theft mechanism
- Lamp life of up to 3000 hours






XD206U

Model	XD206U
Technology	0.55" DLP® chip, 12° DDR, DDP 2000
Resolution	1024 x 768 (total 786,432 pixels)
Brightness	2000 ANSI lumens
Contrast	2000:1
Colors	16.77 million
Video	550 lines
Vertical Frequency (V-Sync)	50–85 Hz
Horizontal Frequency (H-Sync)	15–80 kHz
Band Width	up to 110 MHz
Projection Lamp	205 W
Lamp Life	approx. 3000 hours (low mode) ¹
Lens	F/2.4–2.6, f = 19–21.9 mm
Focus/Zoom	Manual focus and zoom (zoom ratio 1.2:1)
Throw Ratio	1.70–1.96:1
Picture Diagonal	1.02–7.62 m
Fan Noise	34 dB (low mode)
Audio Speaker	2 W Mono
PC Compatibility	640 x 480 to 1024 x 768 pixels (compr. 1280 x 1024 pixels), Sync on green available
Video Compatibility	NTSC/NTSC 4.43, PAL (incl. PAL-M, N), SECAM, PAL-60, Comp. Video: 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i, 60 Hz), 1080i (1.125i, 50 Hz)
Features	Digital Keystone Correction (vertical), Video-Line Doubler (2:3 pull-down), 10-language OSD, PIN code protection, instant shut-down, Security Anchor
Input Terminals	PC (RGB): 1 x mini-D-sub 15-pin Audio: 1 x stereo-mini-jack (ø 3.5 mm) Video: 1 x RCA, 1 x S-Video
Output Terminals	PC (RGB): 1 x mini-D-sub 15-pin Audio: 1 x stereo-mini-jack (ø 3.5 mm)
Communication Terminals	RS-232C (D-sub), USB terminal for page up/down function
Remote Control	Complete operation of the projector, PowerPoint page up/down via USB
Dimensions (W x H x D)	223 x 88 x 256 mm (excl. stand feet)
Weight	2.9 kg
Power Consumption	approx. 300 W
Power Supply	AC 100–240 V, 50/60 Hz
Supplied Accessories	Cable set, remote control (incl. batteries), soft bag, multilingual operation manual (CD-ROM), quick start guide, safety manual, lens cap
Optional Accessories	WLAN adapter

¹Depending on the operation environment and application. This is an average value given by the manufacturer based on ideal conditions.

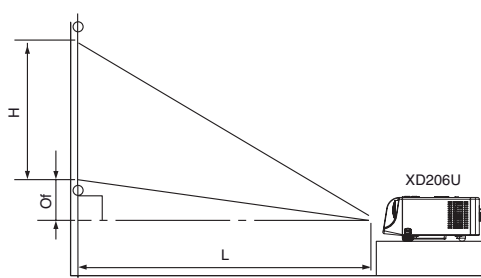


Picture Size (4:3 format)			Distance from Screen (L)		Offset (Of)
Diagonal Size cm	Width cm	Height (H) cm	cm/minimum with maximum zoom	cm/maximum with minimum zoom	cm
102	81	61	137	160	8.8
152	122	91	208	241	13.3
203	163	122	277	323	17.7
254	203	152	348	406	22.1
381	305	229	523	610	33.1
508	406	305	699	813	44.2
635	508	381	874	1016	55.2
762	610	457	1049	-	66.3

(The right to make technical changes is reserved; no liability is accepted for printing or other errors)

Mitsubishi Electric Europe B.V. • German Office • Electronic Visual Systems • Gothaer Str. 8 • D-40880 Ratingen

Tel.: +49 (0) 21 02/4 86 92 50 • Fax: +49 (0) 21 02/4 86 73 20 • www.mitsubishi-evs.de



**MITSUBISHI
ELECTRIC**
Changes for the Better
Electronic Visual Systems